





Applications possibilities

T retaining wall (Agricultural)

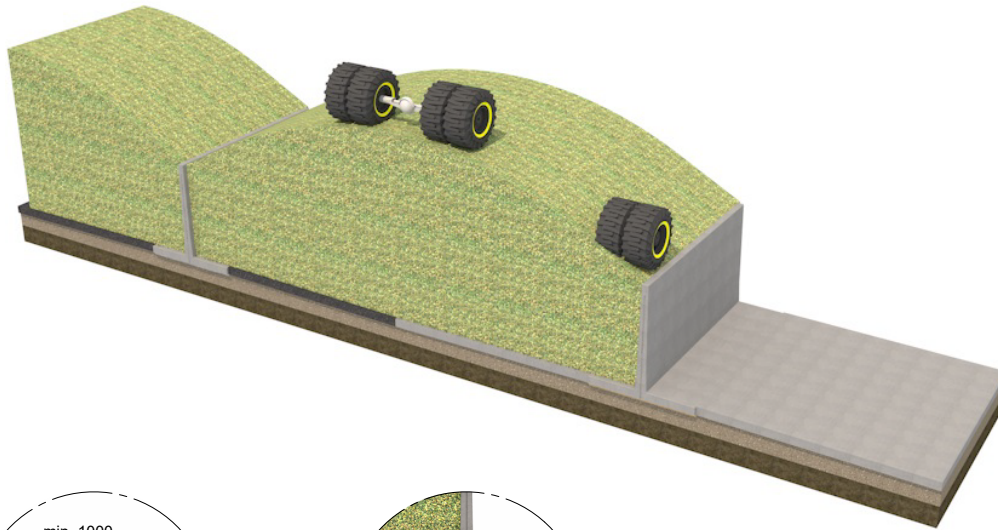

Top-up freestanding

10T Axle load




TW400

Hard-surfaced

140mm to foot

15T Axle load



TWA200_15T

140mm to foot

TWA250_15T

140mm to foot


TWA300_15T

140mm to foot

TWA350_15T

140mm to foot

20T Axle load



TWA150

140mm to foot

TWA175

140mm to foot

TWA200

140mm to foot

TWA250

140mm to foot

TWA300

140mm to foot

TWA400

140mm to foot

Alternative application/loads on request

<p>Max. 28°</p>	<p>Max. silage height panel height + 0.5m</p>	<p>Dry matter content</p> <p>min. 33%</p> <p>min. 25%</p>	<p>Store silage at max. 800kg per m³</p> <p>D: Füllgutklassen 1 u. 2a nach DIN 11622-2</p>
------------------------	---	---	---

Applications shown are based on the Dutch Standard, these may differ per country. This could potentially affect your desired solution.