

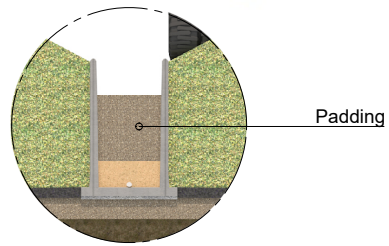
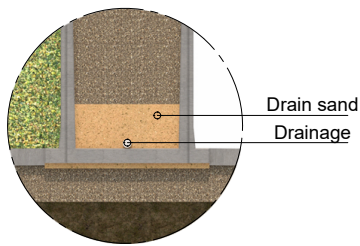




Applications possibilities U retaining wall (Agricultural)

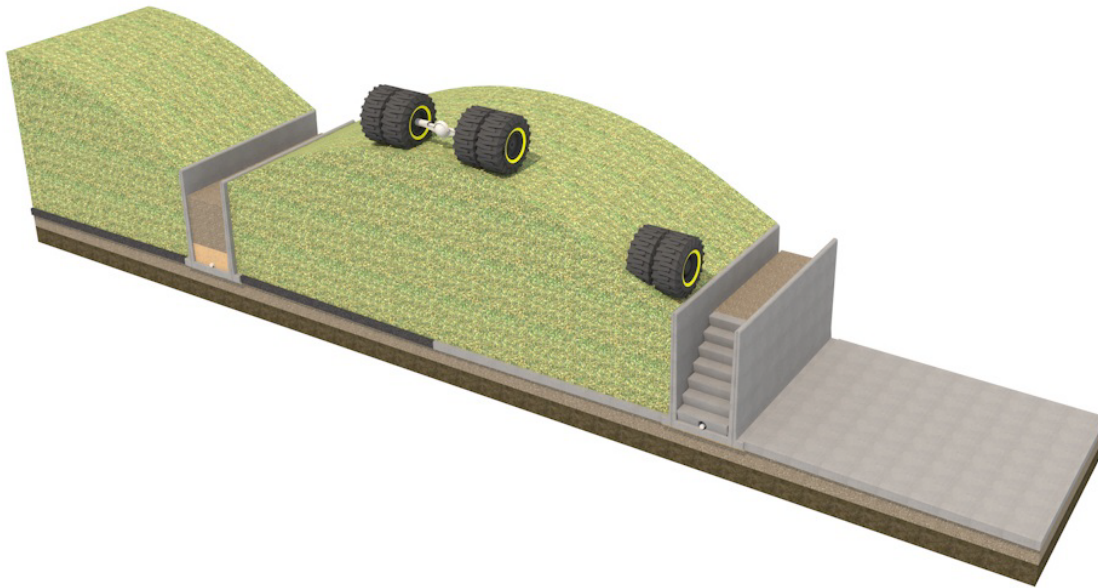

10T axle load



15T axle load



Top-up freestanding

	Unsurfaced	Hard-surfaced	Padding height
U300	Does not apply	160mm to wand	2270mm
U150HAK	290mm over heel	140mm to top heel	1000mm
U175HAK	440mm over heel	140mm to top heel	1200mm
U200HAK	500mm over heel	140mm to top heel	1400mm
U250HAK	540mm over heel	140mm to top heel	1540mm
U300HAK	620mm over heel	160mm to top heel	2020mm

Alternative application/ loads on request

Max. 28°	Max. silage height panel height + 0.5m	Dry matter content min. 33% min. 25%	Store silage at max. 800kg per m³ D: Füllgutklassen 1 u. 2a nach DIN 11622-2
----------------------------	---	--	---

Applications shown are based on the Dutch Standard, these may differ per country. This could potentially affect your desired solution.